

Dusty Evo

Art. No.: 63 200



Technical Data

Filter	
Filter stages	1
Filter method	Cleanable filter
Filter cleaning method	Manual
Filter surface	1.35 m ²
Type of filter	Filter cartridge
Filter material	ePTFE membrane
Filter efficiency	> 99.9 %
Dust classification	M
Basic data	
Extraction capacity	260 m ³ /h
Max. fan performance	360 m ³ /h
Maximum vacuum	18.100 Pa
Dimensions (w x t x h)	410 x 472 x 1004 mm
Weight	29,5 kg
Motor power	1,6 kW
Power supply	1 x 230 V / 50 Hz / 60 Hz
Rated current	8,7 A
Noise level	74 dB(A)
Additional information	
Fan type	Suction turbine
Hose connection	Ø 45 mm / Ø 63 mm
Dust collection tray	6 l

Applications

- Low to medium levels of smoke and dust
- Occasional use
- Nozzles, funnel and torch extraction
- Repair work
- Alternating work places

Benefits





- High extraction capacity due to two high performance turbines
- Best health protection for employees by use of KemTex® ePTFE filter cartridges with surface filtration
- Easy to transport on site or confined spaces due to rigid handle and recessed grips
- For mobile use due to light weight
- Optimal adjustment to the welding process with stepless speed control

Properties

- Manual filter cleaning
- Cleaning indicator
- KemTex® ePTFE filter cartridge
- Portable and mobile
- Stepless speed control
- Dust collection tray, 6L

Accessories

- Automatic start-stop
- Tool tray with cup holder
- Suction hose
- Slot nozzle
- Funnel nozzle
- Connector for welding torches

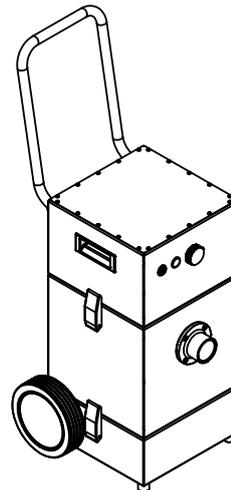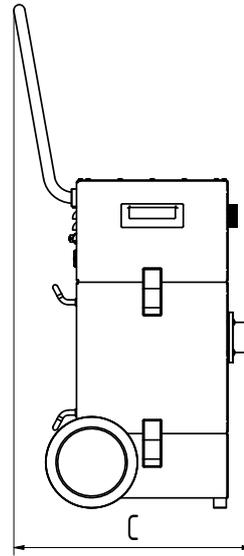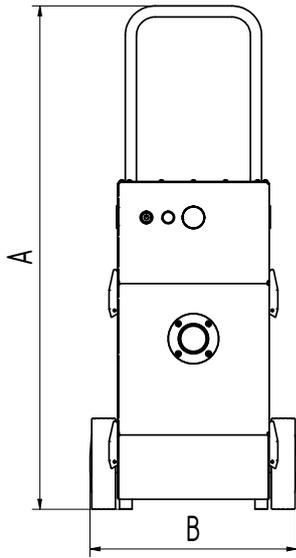

Technical Data

Dimensions

A	1004 mm
B	410 mm
C	472 mm
D	300 mm
E	300 mm